

DMS Wireless

698-760 MHz 120° V-POL

PA698-760-120-15V

Electrical Data


Frequency:	698-760 MHz
Gain:	15 dBi
VSWR:	<1.5:1
Polarization:	Vertical
Horizontal Beamwidth :	120°
Vertical Beamwidth:	7.2°
Nominal Impedance:	50 Ohms
F/B Ratio:	>20 dB
Max Input Power:	250 W
Lightning Protection:	DC Ground

Mechanical Data


Connector :	N Female
Dimensions:	2981*290*130mm
length*width*height	/117.4*11.4*5.1in
Weight:	23.7kg/52.3lb
Reflector Material:	Aluminum Alloy
Radome Material:	UV Resistance PVC
Mounting Method:	Mast
Mast Size:	Ø50-Ø90mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C

Shipment Data



Packing Qty:	1pc/Carton
Carton Size:	3380*330*195mm
(length*width*height)	/133.1*13.0*7.7in
Packing Weight:	24.4kg/53.7lb



H-Plane



V-Plane

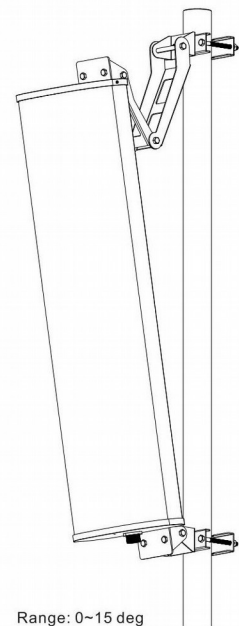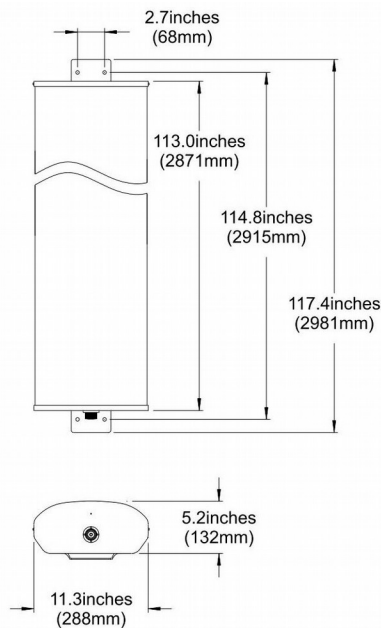

Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
 Images may not reflect the actual product.