

2300-2700 MHz HV-POL

Electrical Data

Frequency:	2300-2700 MHz
Gain:	17 dBi
VSWR:	<1.5:1
Polarization:	Horizontal and Vertical
Horizontal Beamwidth :	20°
Vertical Beamwidth:	18°
Nominal Impedance:	50 Ohms
F/B Ratio:	>30 dB
Port Isolation:	>25 dB
Cross Polarization:	>20 dB
Max Input Power:	100 W
Lightning Protection:	DC Ground



Mechanical Data

Connector :	2*SMA Female
Dimensions:	300*300*25mm
length*width*height	/11.8*11.8*1.0in
Weight:	1.4kg/3.0lb
Reflector Material:	Aluminum Alloy
Radome Material:	Weatherproof ABS
Mounting Method:	Mast
Mast Size:	Ø30-Ø50mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C

Shipment Data

Packing Qty:	10pcs/Carton
Carton Size:	650*350*350mm
(length*width*height)	/20.9*12.6*12.6in
Packing Weight:	14.2kg/31.3lb

PA2300-2700-17HV

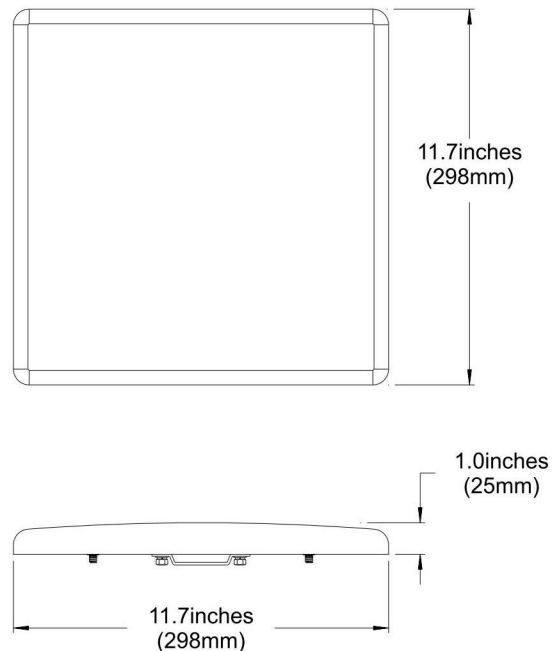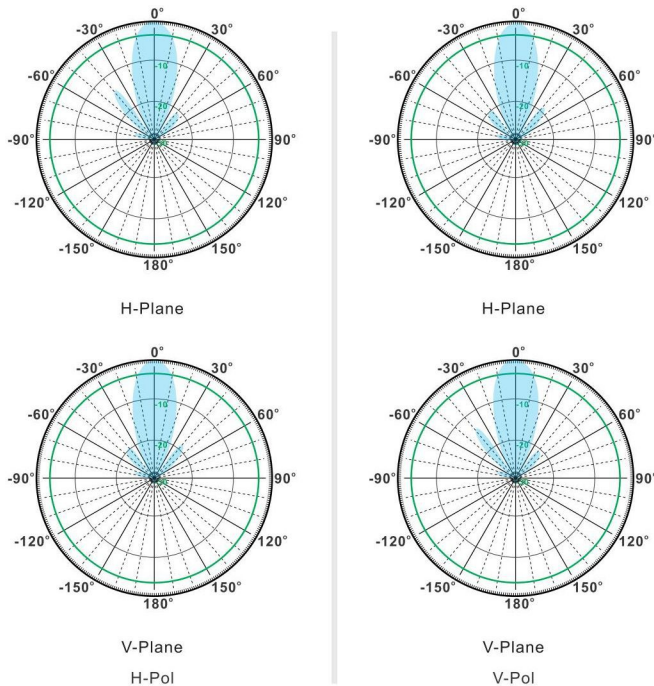

Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
 Images may not reflect the actual product.