

2400-2483 MHz 35° V-Pol

Electrical Data


Frequency:	2400-2483 MHz
Gain:	16 dBi
VSWR:	<1.5:1
Polarization:	Vertical or Horizontal
Horizontal Beamwidth :	35°
Vertical Beamwidth:	35°
Nominal Impedance:	50 Ohms
F/B Ratio:	>25 dB
Max Input Power:	50 W
Lightning Protection:	DC Ground

Mechanical Data


Connector :	RP-SMA Male
Dimensions:	230*230*80mm
length*width*height	/9.06*9.06*1.97in
Weight:	0.85kg/1.87lb
Reflector Material:	Aluminum Alloy
Radome Material:	Weatherproof ABS
Mounting Method:	Mast
Mast Size:	Ø30-Ø50mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C

Shipment Data

Packing Qty:	10pcs/Carton
Carton Size:	500*260*530mm
(length*width*height)	/19.69*10.24*20.87in
Packing Weight:	10kg/22.03lb





H-Plane



V-Plane

PA2400-2483-35-16V

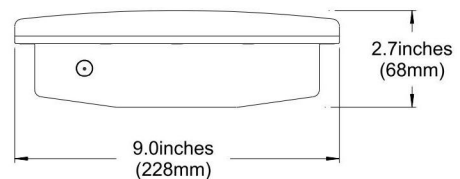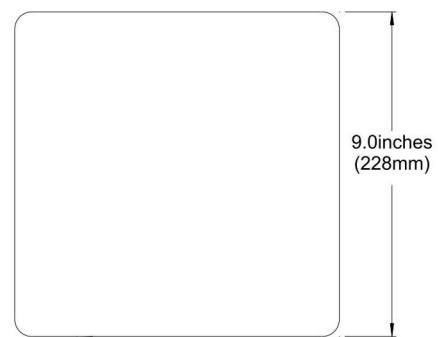

Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
 Images may not reflect the actual product.