

DMS Wireless

1920-2170 MHz 20° H-POL or V-POL

Electrical Data

Frequency:	1920-2170 MHz
Gain:	19 dBi
VSWR:	<1.5:1
Polarization:	Horizontal or Vertical
Horizontal Beamwidth :	20°
Vertical Beamwidth:	20°
Nominal Impedance:	50 Ohms
F/B Ratio:	>25 dB
Max Input Power:	100 W
Lightning Protection:	DC Ground



Mechanical Data

Connector :	N Female
Dimensions:	300*300*45mm
length*width*height	/11.81*11.81*1.77in
Weight:	1.35kg/2.97lb
Reflector Material:	Aluminum Alloy
Radome Material:	Weatherproof ABS
Mounting Method:	Mast
Mast Size:	Ø30-Ø50mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C


Shipment Data

Packing Qty:	10pcs/Carton
Carton Size:	650*350*350mm
(length*width*height)	/20.87*12.6*12.6in
Packing Weight:	14.2kg/31.28lb

PA1920-2170-20-19HV

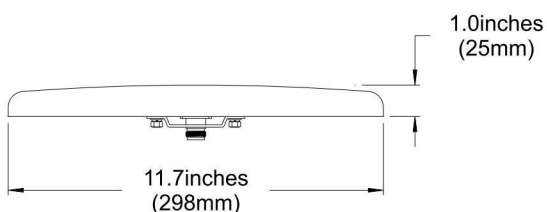

H-Plane



V-Plane

Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
Images may not reflect the actual product.