

DMS Wireless

698-960/1710-2700 MHz 90° V-POL

Electrical Data

Frequency:	698-960 MHz	1710-2700 MHz
Gain:	8 dBi	9 dBi
VSWR:	<1.8:1	
Polarization:	Vertical	
Horizontal Beamwidth :	90°	65°
Vertical Beamwidth:	55°	52°
Nominal Impedance:	50 Ohms	
F/B Ratio:	>10 dB	
Max Input Power:	100 W	
Lightning Protection:	DC Ground	



Mechanical Data

Connector :	N Female
Dimensions:	210*180*45mm
length*width*height	/ 8.27*7.08*1.77in
Weight:	0.54kg/1.19lb
Reflector Material:	Aluminum Alloy
Radome Material:	Weatherproof ABS
Mounting Method:	Mast Or Wall Mount
Mast Size:	Ø30-Ø50mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C

Shipment Data

Packing Qty:	20pcs/Carton
Carton Size:	535*325*415mm
(length*width*height)	/21.06*12.8*16.33in
Packing Weight:	11.7kg/25.77lb

PA698-2700-90-8V

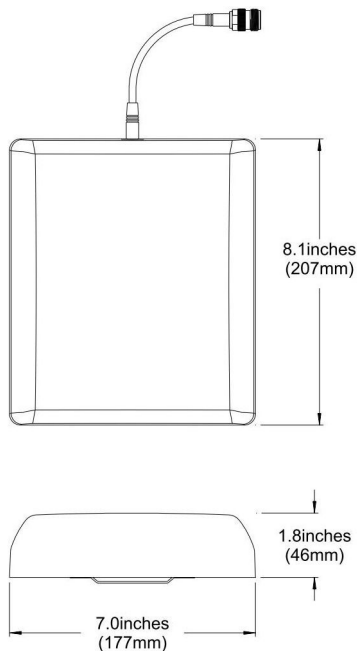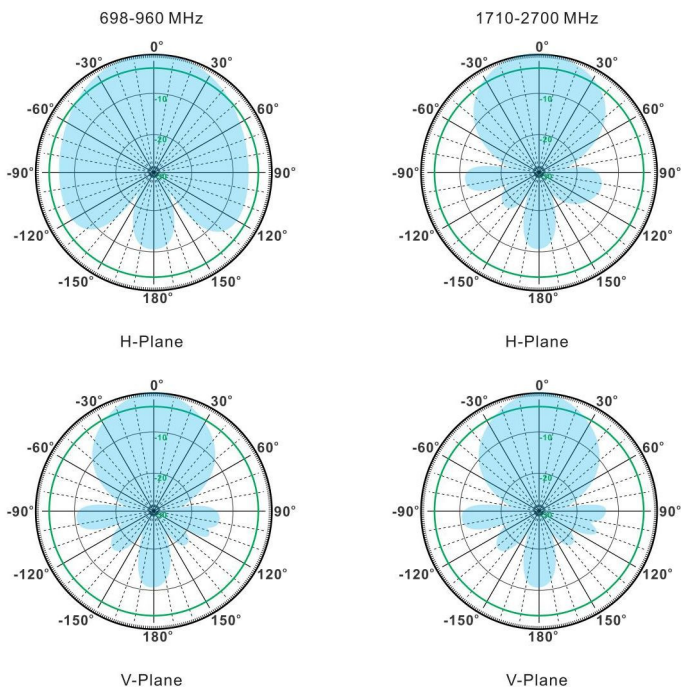

Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
 Images may not reflect the actual product.