

## 2300-2400 MHz XX-POL

### Electrical Data


Frequency:	2300-2400 MHz
Gain:	7 dBi
VSWR:	<1.5:1
Polarization:	±45°
Horizontal Beamwidth :	85°±8°
Vertical Beamwidth:	82°±8°
Nominal Impedance:	50 Ohms
F/B Ratio:	>15 dB
Port Isolation:	>23 dB
Max Input Power:	100 W
Lightning Protection:	DC Ground

### Mechanical Data


Connector :	4*N Female
Dimensions:	210*180*45mm
length*width*height	8.3*7.1*1.8in
Weight:	0.62kg/1.37lb
Reflector Material:	Aluminum Alloy
Radome Material:	Weatherproof ABS
Mounting Method:	Mast
Mast Size:	Ø30-Ø50mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C

### Shipment Data

Packing Qty:	20pcs/Carton
Carton Size:	520*410*425mm
(length*width*height)	/20.5*16.2*16.7in
Packing Weight:	13.2kg/29.0lb





±45° polarization H-Plane



±45° polarization V-Plane

## PA2300-2400-7XX

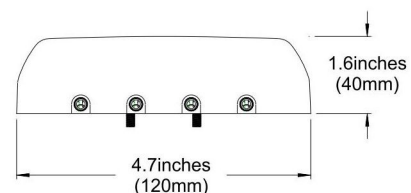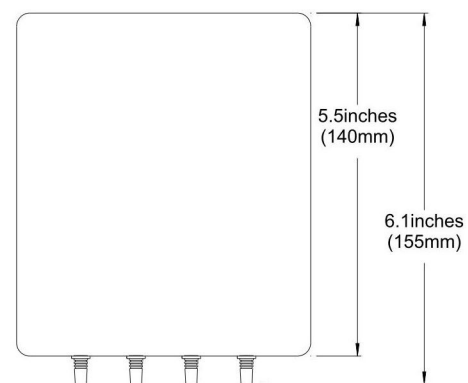

Email: [sales@dmswireless.com](mailto:sales@dmswireless.com)  
[www.dmswireless.com](http://www.dmswireless.com)

Notice: Specifications are subject to change without notice.  
 Images may not reflect the actual product.