DMS Wireless

5725-5850 MHz 60° H-POL


Electrical Data	
Frequency:	5725-5850 MHz
Gain:	18 dBi
VSWR:	<1.5:1
Polarization:	Horizontal
Horizontal Beamwidth :	60°
Vertical Beamwidth:	6°
Nominal Impedance:	50 Ohms
F/B Ratio:	>25 dB
Max Input Power:	100 W
Connector:	N Female
Connector:	N Female
Dimensions:	816*66*119mm
length*width*height	/32.1*2.6*4.7in
Weight:	3.6kg/7.9lb
Reflector Material:	Aluminum Alloy
Radome Material:	UV Resistance PVC
Mounting Method:	Mast
Mast Size:	Ø40-Ø70mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65℃
Shipment Data	
Shipment Data Packing Qty:	1pc/Carton

/48.0*6.3*4.5in

4.2kg/9.2lb


PA5725-5850-60-18H





(length*width*height)

Packing Weight:

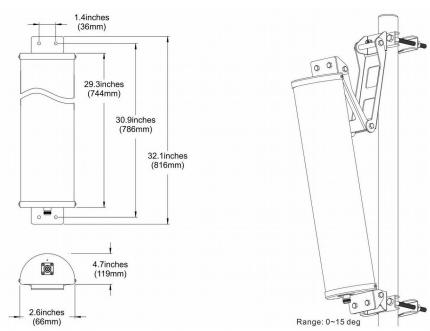

Email: sales@dmswireless.com
Notice: Specifications are subject to change without notice.
Images may not reflect the actual product.