

# DMS Wireless

**5725-5850 MHz H-POL or V-POL**

## Electrical Data

Frequency:	5725-5850 MHz
Gain:	30 dBi
VSWR:	<1.5:1
Polarization:	Horizontal or Vertical
Horizontal Beamwidth :	4°
Vertical Beamwidth:	4°
Nominal Impedance:	50 Ohms
F/B Ratio:	>30
Max Input Power:	100 W
Lightning Protection	DC Ground


## Mechanical Data

Connector :	N Female
Dimensions:	1021*600*380mm
(diameter*height)	/40.2*23.6*15.0in
Weight:	4.5kg/9.9lb
Reflector Material:	Brass
Mounting Method:	Mast
Mast Size:	Ø30-Ø50mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C


## Shipment Data

Packing Qty:	5pcs/Carton
Carton Size:	630*565*230mm
(length*width*height)	/24.8*22.2*9.1in
Packing Weight:	23.3kg/51.3lb



## GA5725-5850-30HV

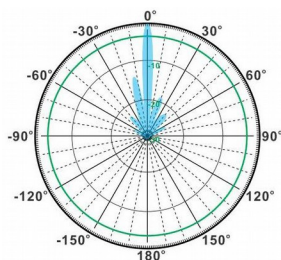

H-Plane



V-Plane

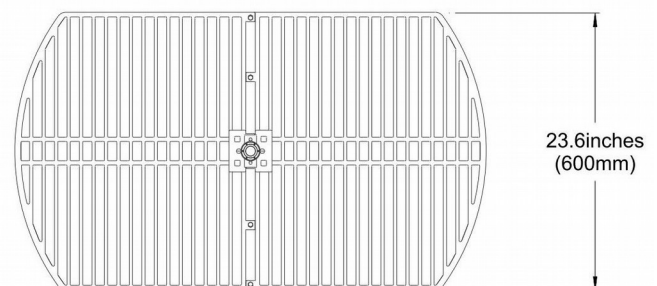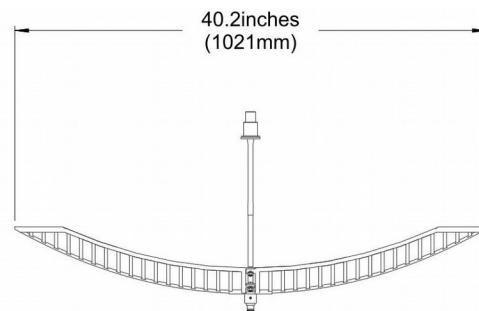

Email: [sales@dmswireless.com](mailto:sales@dmswireless.com)  
[www.dmswireless.com](http://www.dmswireless.com)

Notice: Specifications are subject to change without notice.  
Images may not reflect the actual product.