

MA2400-2483-7V

2400-2483 MHz V- Pol


Electrical Data

| | |
|------------------------|---------------|
| Frequency: | 2400-2483 MHz |
| Gain: | 7 dBi |
| VSWR: | <1.5:1 |
| Polarization: | Vertical |
| Horizontal Beamwidth : | 360° |
| Vertical Beamwidth: | 36° |
| Nominal Impedance: | 50 Ohms |
| Max Input Power: | 50 W |
| Lightning Protection: | DC Ground |


Mechanical Data

| | |
|------------------------|-------------------|
| Connector : | SMA or customized |
| Dimensions: | 260mm/10.2in |
| Weight: | 0.2kg/0.4lb |
| Operating temperature: | -40~+55°C |

Remark: match with a magnet mount.

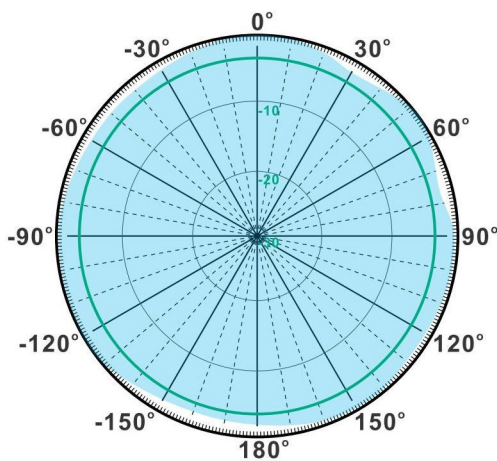

H-Plane

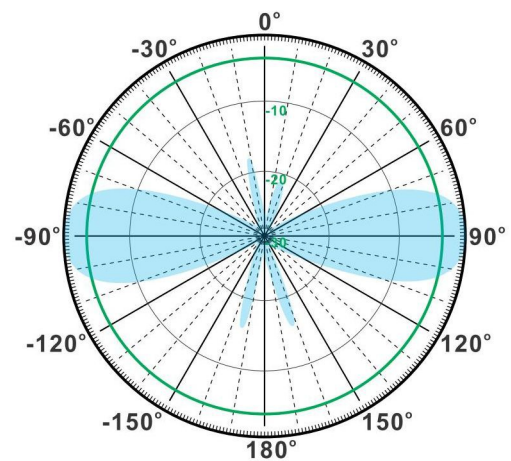

V-Plane