

# DMS Wireless

**2400-2500 MHz 56° V-POL**

## Electrical Data


Frequency:	2400-2500 MHz
Gain:	3dBi
VSWR:	<1.8:1
Polarization:	Vertical
Horizontal Beamwidth :	360°
Vertical Beamwidth:	56°
Nominal Impedance:	50 Ohms
Isolation:	>20 dB
Max Input Power:	100 W
Lightning Protection:	DC Ground

## Mechanical Data


Connector :	2*N Female
Dimensions:	Ø150*60mm
diameter*length	Ø5.91*2.36in
Weight:	0.25kg/0.55lb
Cable Length:	2*170mm
Reflector Material:	Aluminum Alloy
Radome Material:	Weatherproof ABS
Mounting Method:	Fit with nut
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C

## Shipment Data

Packing Qty:	20pcs/Carton
Carton Size:	850*350*310mm
(length*width*height)	33.5*13.8*12.2in
Packing Weight:	6kg/13.22lb




H-Plane




V-Plane

## CA2400-2500-3V-2N

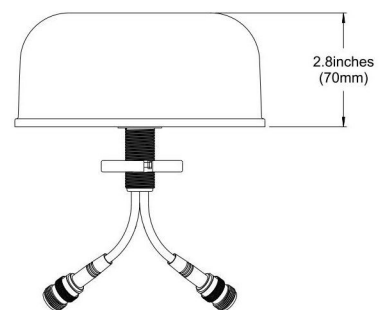

6.1 inches  
(Ø154mm)



Email: [sales@dmswireless.com](mailto:sales@dmswireless.com)  
[www.dmswireless.com](http://www.dmswireless.com)

Notice: Specifications are subject to change without notice.  
Images may not reflect the actual product.