

DMS Wireless

806-960 MHz 90° V-POL

Electrical Data

Frequency:	806-960 MHz
Gain:	16 dBi
VSWR:	<1.5:1
Polarization:	Vertical
Horizontal Beamwidth :	90°
Vertical Beamwidth:	8°
Nominal Impedance:	50 Ohms
F/B Ratio:	>20 dB
Max Input Power:	250 W
Lightning Protection:	DC Ground


Mechanical Data

Connector :	N Female
Dimensions:	2422*290*130mm
length*width*height	/95.4*11.4*5.1in
Weight:	18.4kg/40.5lb
Reflector Material:	Aluminum Alloy
Radome Material:	UV Resistance PVC
Mounting Method:	Mast
Mast Size:	Ø50-Ø90mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C


Shipment Data

Packing Qty:	1pc/Carton
Carton Size:	2820*330*195mm
(length*width*height)	/111.0*13.0*7.7in
Packing Weight:	21 kg/46.3lb



PA806-960-90-16V



H-Plane



V-Plane

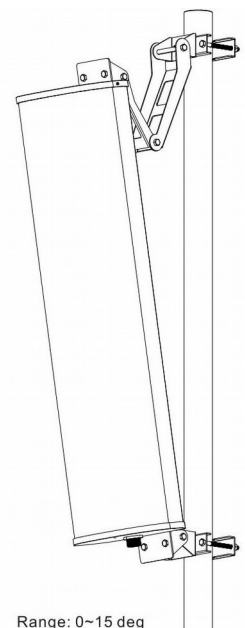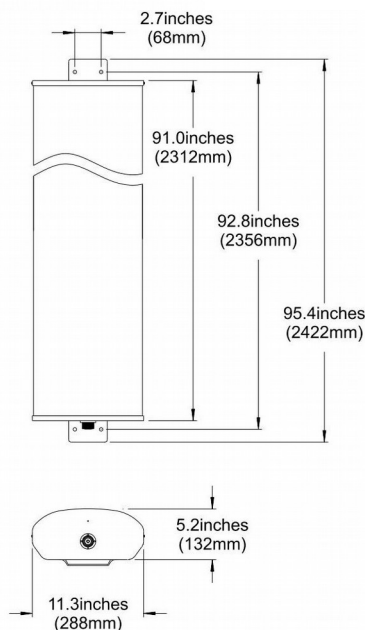

Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
Images may not reflect the actual product.