

DMS Wireless

2400-2483 MHz H-POL or V-POL

Electrical Data

Frequency:	2400-2483 MHz
Gain:	24 dBi
VSWR:	<1.5:1
Polarization:	Horizontal or Vertical
Horizontal Beamwidth :	9.5°
Vertical Beamwidth:	13°
Nominal Impedance:	50 Ohms
F/B Ratio:	>30
Max Input Power:	100 W
Lightning Protection	DC Ground


Mechanical Data

Connector :	N Female
Dimensions:	1021*600*380mm
(diameter*height)	/40.2*23.6*15.0in
Weight:	2.6kg/5.7lb
Reflector Material:	Brass
Mounting Method:	Mast
Mast Size:	Ø30-Ø50mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C


Shipment Data

Packing Qty:	5pcs/Carton
Carton Size:	630*565*230mm
(length*width*height)	/24.8*22.2*9.1in
Packing Weight:	17kg/37.4lb



GA2400-2483-24HV-2



H-Plane



V-Plane

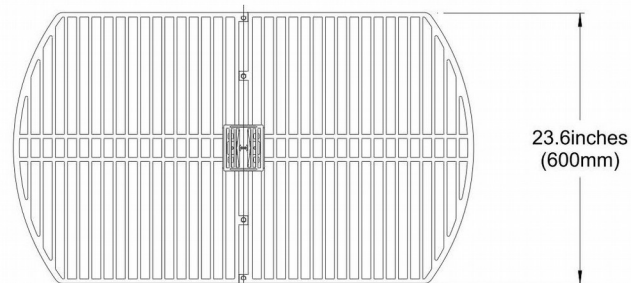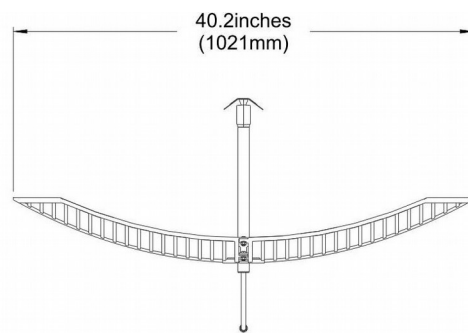

Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
Images may not reflect the actual product.