

DMS Wireless

2400-2483 MHz 35° V-POL

Electrical Data


Frequency:	2400-2483 MHz
Gain:	15 dBi
VSWR:	<1.5:1
Polarization:	Vertical
Horizontal Beamwidth :	35°
Vertical Beamwidth:	35°
Nominal Impedance:	50 Ohms
F/B Ratio:	>25 dB
Max Input Power:	50 W
Lightning Protection:	DC Ground

Mechanical Data


Connector :	N Female
Dimensions:	230*230*68mm
length*width*height	/9.1*9.1*2.7in
Weight:	0.9kg/1.9lb
Reflector Material:	Aluminum Alloy
Radome Material:	Weatherproof ABS
Mounting Method:	Mast
Mast Size:	Ø30-Ø50mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C

Shipment Data

Packing Qty:	20pcs/Carton
Carton Size:	515*405*420mm
(length*width*height)	20.3*15.9*16.5in
Packing Weight:	20kg/22.0lb





H-Plane



V-Plane

PA2400-2483-35-15V

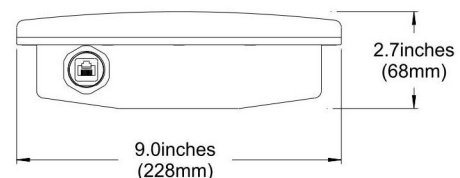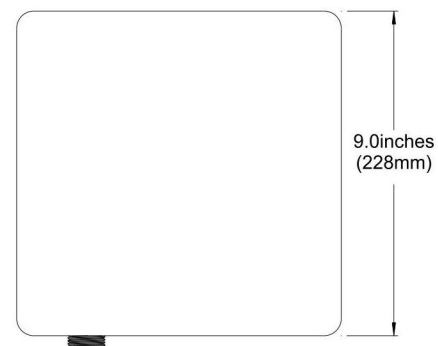

Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
Images may not reflect the actual product.