

DMS Wireless

2500-2686 MHz 120° H-POL

Electrical Data

Frequency:	2500-2686 MHz
Gain:	16 dBi
VSWR:	<1.5:1
Polarization:	Horizontal
Horizontal Beamwidth :	120°
Vertical Beamwidth:	7°
Nominal Impedance:	50 Ohms
F/B Ratio:	>15dB
Max Input Power:	100 W
Lightning Protection:	DC Ground


Mechanical Data

Connector :	N Female
Dimensions:	1350*165*70mm
length*width*height	/53.2*6.5*2.8in
Weight:	4.2kg/9.3lb
Reflector Material:	Aluminum Alloy
Radome Material:	UV Resistance PVC
Mounting Method:	Mast
Mast Size:	Ø40-Ø70mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C


Shipment Data

Packing Qty:	1pc/Carton
Carton Size:	1640*200*110mm
(length*width*height)	/64.6*7.9*4.3in
Packing Weight:	4.9kg/10.7lb



PA2500-2686-120-16H



H-Plane



V-Plane

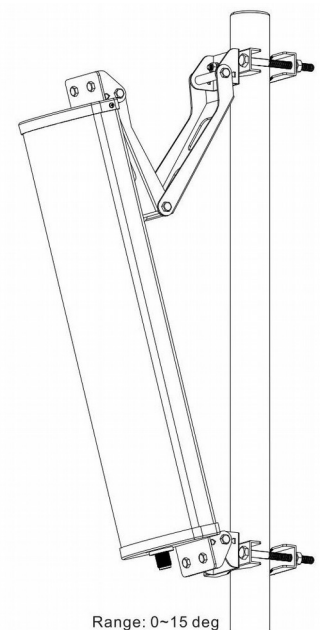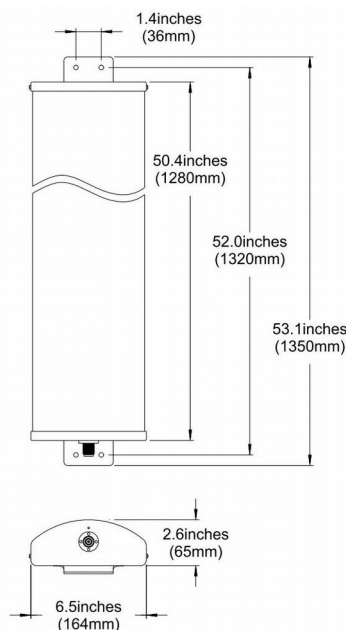

Range: 0~15 deg

Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
Images may not reflect the actual product.