

# DMS Wireless

**2300-2700 MHz 40° V-POL**

## Electrical Data


Frequency:	2300-2700 MHz
Gain:	13 dBi
VSWR:	<1.5:1
Polarization:	Vertical
Horizontal Beamwidth :	40°
Vertical Beamwidth:	40°
Nominal Impedance:	50 Ohms
F/B Ratio:	>20 dB
Max Input Power:	100 W
Lightning Protection:	DC Ground

## Mechanical Data


Connector :	SMA Female
Dimensions:	140*120*40mm
length*width*height	/5.52*4.73*1.58in
Weight:	0.6kg/1.32lb
Reflector Material:	Aluminum Alloy
Radome Material:	Weatherproof ABS
Mounting Method:	Mast
Mast Size:	Ø30-Ø50mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C

## Shipment Data

Packing Qty:	20pcs/Carton
Carton Size:	430*280*320mm
(length*width*height)	16.9*11.0*12.6in
Packing Weight:	13kg/28.6lb





H-Plane



V-Plane

## PA2300-2700-40-13V

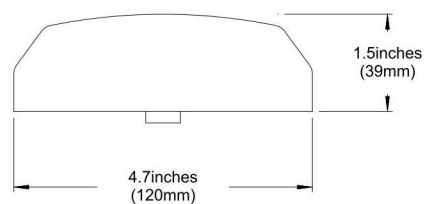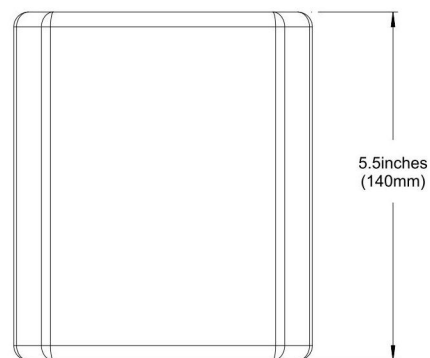

Email: [sales@dmswireless.com](mailto:sales@dmswireless.com)  
[www.dmswireless.com](http://www.dmswireless.com)

Notice: Specifications are subject to change without notice.  
Images may not reflect the actual product.