

DMS Wireless

2400-2483 MHz 35° V-POL

Electrical Data



Frequency:	2400-2483MHz
Gain:	15dBi(antenna)+15dB(amplifier)
VSWR:	<1.5
Polarization:	Vertical
Horizontal Beamwidth :	35°
Vertical Beamwidth:	35°
Nominal Impedance:	50Ω
F/B Ratio:	≥20dB
Auto TX/RX switching:	Yes
Input Power:	3dBm-20dBm(Typ.) 10dBm-14dBm(best for 11g)
Output Power:	45dBm for 11g (MAX)
Noise Figure:	3.5dB
Operating Temp.:	-40~70°C
AC Adapter:	12V 1.5A
Lightning Protection:	DC Ground

Mechanical Data

Connector :	N Female
Dimensions:	228*228*68mm length*width*height
Weight:	1.8kg/4.0lb
Reflector Material:	Aluminum Alloy
Radome Material:	Weatherproof ABS
Mounting Method:	Mast
Mast Size:	Ø40-Ø70mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C

Shipment Data

Packing Qty:	10pc/Carton
Carton Size:	500*260*530mm (length*width*height)
Packing Weight:	19kg/41.9lb

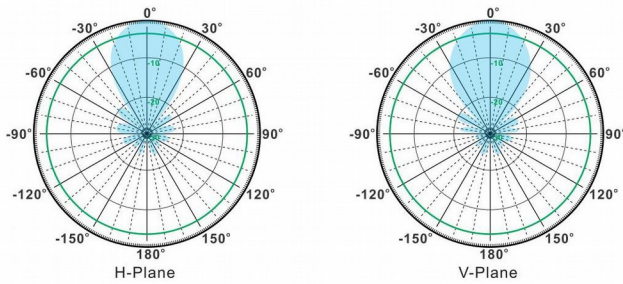

PA2400-2483-35-15+15V



(The package includes: Antenna ,AC/DC Adapter, DC Supplier and Mounting Kit)



Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
Images may not reflect the actual product.