

## 1710-1880 MHz 30° H-Pol or V-Pol

### Electrical Data


Frequency:	1710-1880 MHz
Gain:	18 dBi
VSWR:	<1.5:1
Polarization:	Vertical or Horizontal
Horizontal Beamwidth :	30°
Vertical Beamwidth:	30°
Nominal Impedance:	50 Ohms
F/B Ratio:	>25 dB
Max Input Power:	100 W
Lightning Protection:	DC Ground

### Mechanical Data


Connector :	SMA Female
Dimensions:	300*300*45mm
length*width*height	/11.8*11.8*1.8in
Weight:	2kg/4.4lb
Reflector Material:	Aluminum Alloy
Radome Material:	Weatherproof ABS
Mounting Method:	Mast
Mast Size:	Ø30-Ø50mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C

### Shipment Data

Packing Qty:	10pcs/Carton
Carton Size:	530*380*380mm
(length*width*height)	/20.9*15.0*15.0in
Packing Weight:	22kg/48.5lb





H-Plane



V-Plane

## PA1710-1880-30-18HV

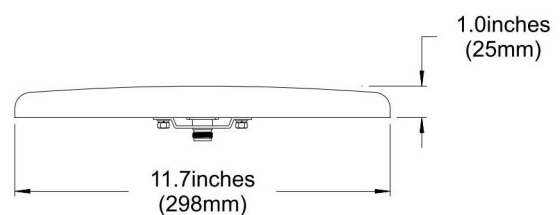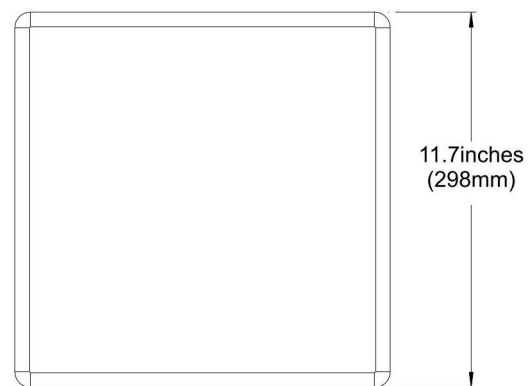

Email: [sales@dmswireless.com](mailto:sales@dmswireless.com)  
[www.dmswireless.com](http://www.dmswireless.com)

Notice: Specifications are subject to change without notice.  
 Images may not reflect the actual product.