

2400-2483 MHz 90° V-POL

Electrical Data


Frequency:	2400-2483 MHz
Gain:	5 dBi
VSWR:	<1.5:1
Polarization:	Vertical
Horizontal Beamwidth :	90°
Vertical Beamwidth:	80°
Nominal Impedance:	50 Ohms
F/B Ratio:	>18 dB
Max Input Power:	100 W
Lightning Protection:	DC Ground

Mechanical Data


Connector :	SMA Male
Dimensions:	140*120*40mm
length*width*height	/5.5*4.7*1.6in
Weight:	0.6kg/1.2lb
Reflector Material:	Aluminum Alloy
Radome Material:	Weatherproof ABS
Mounting Method:	S-Bracket
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C

Shipment Data

Packing Qty:	20pcs/Carton
Carton Size:	650*240*310mm
(length*width*height)	/25.6*9.4*12.2in
Packing Weight:	12kg/26.4b





H-Plane



V-Plane

PA2400-2483-90-5V

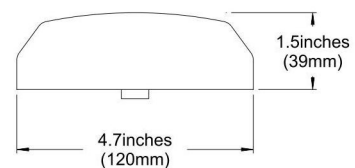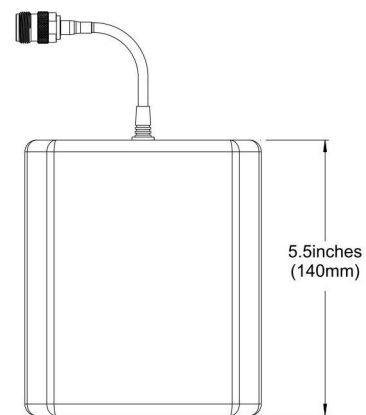

Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
 Images may not reflect the actual product.