

DMS Wireless

2400-2500/5150-5850 MHz 40° V-POL

Electrical Data


Frequency:	2400-2500/5150-5850 MHz
Gain:	13 dBi
VSWR:	<2.0:1
Polarization:	Vertical
Horizontal Beamwidth :	40°
Vertical Beamwidth:	35°
Nominal Impedance:	50 Ohms
F/B Ratio:	>20 dB
Max Input Power:	100 W
Lightning Protection:	DC Ground

Mechanical Data


Connector :	N Female
Dimensions:	140*120*40mm
length*width*height	/5.52*4.73*1.58in
Weight:	0.6kg/1.32lb
Reflector Material:	Aluminum Alloy
Radome Material:	Weatherproof ABS
Mounting Method:	Mast
Mast Size:	Ø30-Ø50mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65℃

Shipment Data

Packing Qty:	20pcs/Carton
Carton Size:	430*280*370mm
(length*width*height)	16.9*11.0*14.6in
Packing Weight:	13kg/28.6lb





H-Plane



V-Plane

PA2400-5850-40-13V

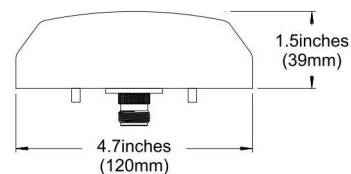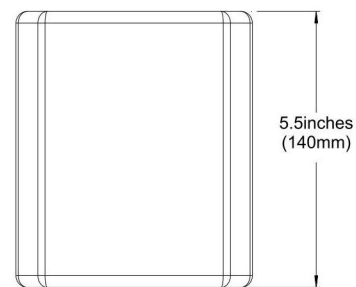

Email: sales@dmswireless.com
www.dmswireless.com

*Notice: Specifications are subject to change without notice.
Images may not reflect the actual product.*