

# DMS Wireless

**5500-5700 MHz 13° V-POL**

## Electrical Data


Frequency:	5500-5700 MHz
Gain:	20 dBi
VSWR:	<1.5:1
Polarization:	Vertical
Horizontal Beamwidth :	13°
Vertical Beamwidth:	13°
Nominal Impedance:	50 Ohms
F/B Ratio:	>25 dB
Max Input Power:	50 W
Lightning Protection:	DC Ground

## Mechanical Data


Connector :	N Female
Dimensions:	230*230*80mm
length*width*height	/9.06*9.06*1.97in
Weight:	0.85kg/1.87lb
Reflector Material:	Aluminum Alloy
Radome Material:	Weatherproof ABS
Mounting Method:	Mast
Mast Size:	Ø30-Ø50mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C

## Shipment Data

Packing Qty:	10pcs/Carton
Carton Size:	500*260*530mm
(length*width*height)	/19.69*10.24*20.87in
Packing Weight:	10kg/22.03lb





H-Plane



V-Plane

## PA5500-5700-13-20V

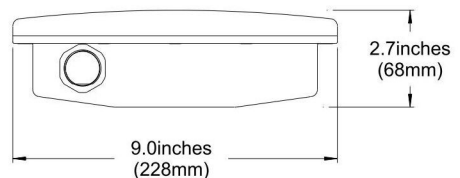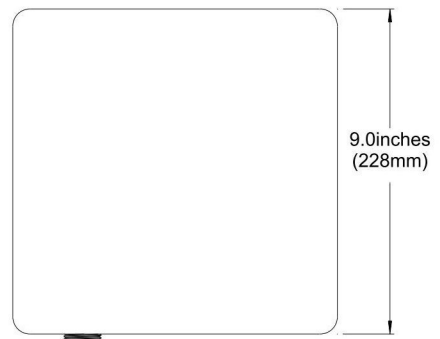

Email: [sales@dmswireless.com](mailto:sales@dmswireless.com)  
[www.dmswireless.com](http://www.dmswireless.com)

Notice: Specifications are subject to change without notice.  
Images may not reflect the actual product.