

806-960/1710-2500 MHz V-POL

CA806-2500-3V-2

Electrical Data


Frequency:	806-960/1710-2500 MHZ
Gain:	3 dBi
VSWR:	<1.5:1
Polarization:	Vertical
Horizontal Beamwidth :	360°
Vertical Beamwidth:	68°
Nominal Impedance:	50 Ohms
Max Input Power:	100 W
Lightning Protection:	DC Ground

Mechanical Data


Connector :	SMA Female
Dimensions:	Ø120*80mm
(diameter*length)	Ø4.7*3.1in
Weight:	0.3kg/0.6lb
Cable Length:	350mm/13.8in
Reflector Material:	Aluminum Alloy
Radome Material:	Weatherproof ABS
Mounting Method:	Fit with nut
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C

Shipment Data


Packing Qty:	20pcs/Carton
Carton Size:	720*300*330cm
(length*width*height)	/28.4*11.8*13.0in
Packing Weight:	7kg/15.4lb



H-Plane



V-Plane

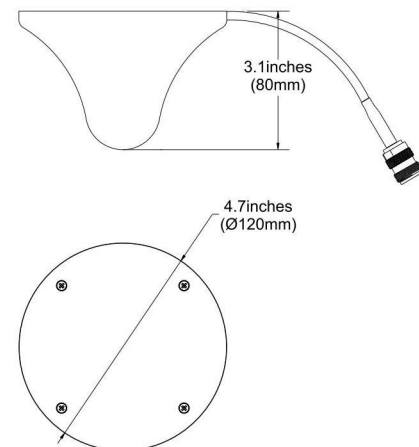

Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
 Images may not reflect the actual product.