

DMS Wireless

698-2700 MHz 20° H-POL

Electrical Data

Frequency:	698-2700 MHz
Gain:	10 dBi
VSWR:	<1.5:1
Polarization:	Horizontal
Horizontal Beamwidth :	20°
Vertical Beamwidth:	20°
Nominal Impedance:	50 Ohms
F/B Ratio:	>30 dB
Max Input Power:	100 W
Lightning Protection:	DC Ground


Mechanical Data

Connector :	N Female
Dimensions:	405*165*70mm
length*width*height	/15.94*6.5*2.76in
Weight:	2kg/4.41lb
Reflector Material:	Aluminum Alloy
Radome Material:	UV Resistance PVC
Mounting Method:	Mast
Mast Size:	Ø40-Ø50mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C


Shipment Data

Packing Qty:	1pc/Carton
Carton Size:	680*210*120mm
(length*width*height)	/26.77*8.27*4.73in
Packing Weight:	2.6kg/5.73lb



PA698-2700-20-10H



H-Plane



V-Plane

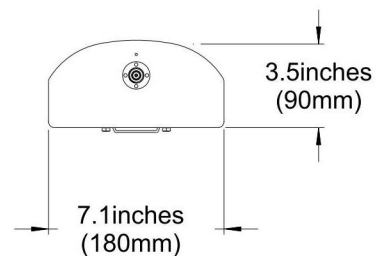

Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
Images may not reflect the actual product.