

DMS Wireless

2500-2686 MHz V- POL

Electrical Data


Frequency:	2500-2686 MHz
Gain:	6 dBi
VSWR:	<1.5:1
Polarization:	Vertical
Horizontal Beamwidth :	360°
Vertical Beamwidth:	21°
Nominal Impedance:	50 Ohms
Max Input Power:	100 W
Lightning Protection:	DC Ground

Mechanical Data


Connector :	N Female
Dimensions:	Ø38*600mm
(diameter*length)	Ø1.5*23.6in
Weight:	1.14kg/2.51lb
Reflector Material:	Brass
Radome Material:	Fiberglass
Mounting Method:	Mast
Mast Size:	Ø40-Ø60mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C

Shipment Data

Packing Qty:	2pcs/Carton
Carton Size:	Ø120*690mm
(length*width*height)	Ø4.7*27.2in
Packing Weight:	3kg/6.61lb





H-Plane



V-Plane

OM2500-2686-6V

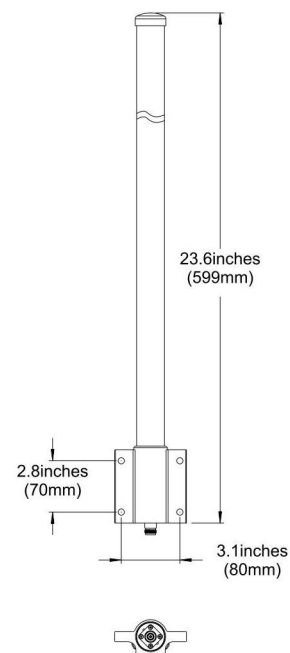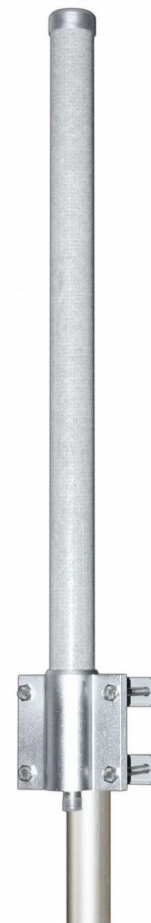

Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
Images may not reflect the actual product.