

DMS Wireless

2400-2483 MHz 65° XX-POL

Electrical Data

Frequency:	2400-2483 MHz
Gain:	19 dBi
VSWR:	<1.5:1
Polarization:	±45°
Horizontal Beamwidth:	65°
Vertical Beamwidth:	5.6°
Electrical downtilt:	0°
Sidelobe suppression :	>15dB
(First sidelobe above main beam)	
Front-to-back ratio :	>25dB
Isolation:	>30dB
Cross-polar ratio:	>15dB (±60°≥10)
Intermodulation IM3:	>-150dBc
(2×43dBm carrier)	
Impedance:	50 Ohms
Max Input Power:	100W
Lightning Protection:	DC Ground


Mechanical Data

Connector :	4*N Female
Connector position:	Bottom
Dimensions:	1370*285*90mm
length*width*height	53.9*11.2*3.5in
Weight:	6.8kg/15.0lb
Reflector Material:	Aluminum Alloy
Radome Material:	UV Resistance PVC
Mounting Method:	Mast
Mast Size:	Ø40-Ø70mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C


Shipment Data

Packing Qty:	1pc/Carton
Carton Size:	1500*220*135mm
(length*width*height)	59.1*8.7*5.3in
Packing Weight:	7.5kg/16.5lb



PA2400-2483-65-19XX



±45° polarization H-Plane



±45° polarization V-Plane

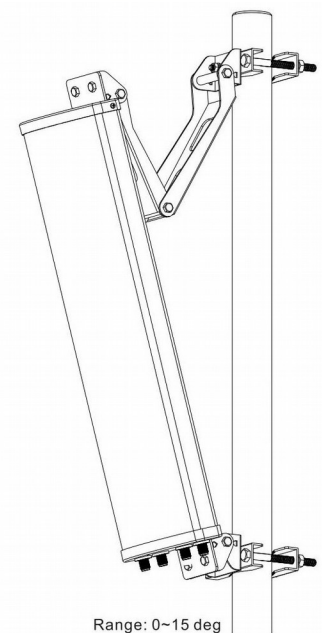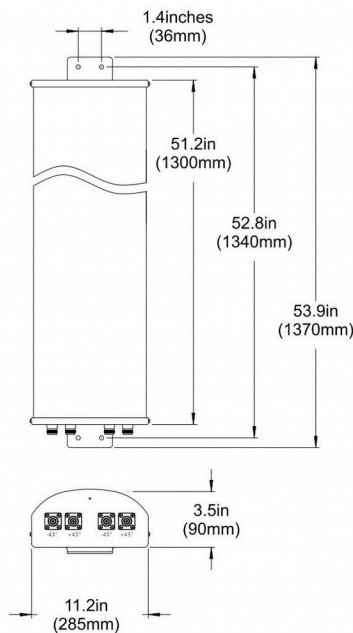

Range: 0~15 deg

Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
 Images may not reflect the actual product.