

4900-5875 MHz 10° H-POL or V-POL

Electrical Data


| | |
|------------------------|------------------------|
| Frequency: | 4900-5875 MHz |
| Gain: | 22 dBi |
| VSWR: | <1.5:1 |
| Polarization: | Horizontal or Vertical |
| Horizontal Beamwidth : | 10° |
| Vertical Beamwidth: | 12° |
| Nominal Impedance: | 50 Ohms |
| F/B Ratio: | >25 dB |
| Max Input Power: | 100 W |
| Lightning Protection: | DC Ground |

Mechanical Data


| | |
|------------------------|------------------|
| Connector : | N Female |
| Dimensions: | 300*300*45mm |
| length*width*height | /11.8*11.8*1.8in |
| Weight: | 1.4kg/3.0lb |
| Reflector Material: | Aluminum Alloy |
| Radome Material: | Weatherproof ABS |
| Mounting Method: | Mast |
| Mast Size: | Ø30-Ø50mm |
| Rated Wind Velocity: | 210km/h |
| Operating temperature: | -40~+65°C |

Shipment Data

| | |
|-----------------------|-------------------|
| Packing Qty: | 10pcs/Carton |
| Carton Size: | 650*350*350mm |
| (length*width*height) | /20.9*12.6*12.6in |
| Packing Weight: | 14.2kg/31.3lb |




H-Plane



V-Plane

PA4900-5875-10-22HV

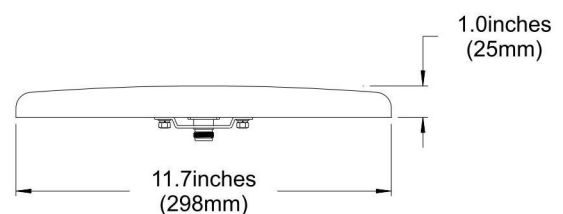

Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
 Images may not reflect the actual product.