

## 902-928 MHz 60° L Circular - POL

### Electrical Data


Frequency:	902-928 MHz
Gain:	9 dBi
VSWR:	<1.5:1
Polarization:	L Circular Polarization
Horizontal Beamwidth :	60°
Vertical Beamwidth:	60°
Nominal Impedance:	50 Ohms
F/B Ratio:	>19 dB
Max Input Power:	100 W
Lightning Protection:	DC Ground

### Mechanical Data


Connector :	N Female
Dimensions:	300*300*45mm
length*width*height	/11.81*11.81*1.77in
Weight:	1.35kg/2.97lb
Reflector Material:	Aluminum Alloy
Radome Material:	Weatherproof ABS
Mounting Method:	Mast
Mast Size:	Ø30-Ø50mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65℃

### Shipment Data

Packing Qty:	10pcs/Carton
Carton Size:	650*350*350mm
(length*width*height)	/20.87*12.6*12.6in
Packing Weight:	14.2kg/31.28lb





H-Plane



V-Plane

## PA902-928-60-9LC

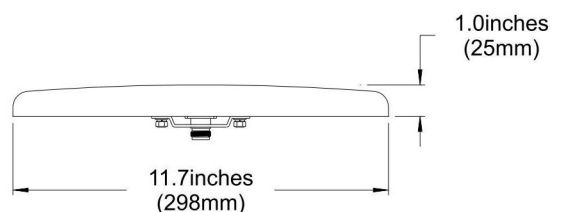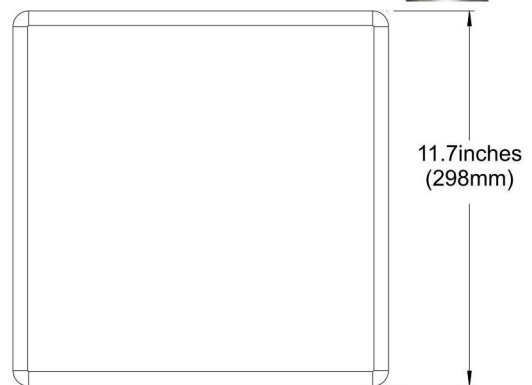

Email: [sales@dmswireless.com](mailto:sales@dmswireless.com)  
[www.dmswireless.com](http://www.dmswireless.com)

Notice: Specifications are subject to change without notice.  
 Images may not reflect the actual product.