

DMS Wireless

2500-2686 MHz 120° V-POL

PA2500-2686-120-13V

Electrical Data


Frequency:	2500-2686 MHz
Gain:	13 dBi
VSWR:	<1.5:1
Polarization:	Vertical
Horizontal Beamwidth :	120°
Vertical Beamwidth:	13°
Nominal Impedance:	50 Ohms
F/B Ratio:	>20 dB
Max Input Power:	100 W
Lightning Protection:	DC Ground

Mechanical Data


Connector :	N Female
Dimensions:	571*164*65mm
length*width*height	/22.5*6.5*2.6in
Weight:	3.5kg/7.7lb
Reflector Material:	Aluminum Alloy
Radome Material:	UV Resistance PVC
Mounting Method:	Mast
Mast Size:	Ø40-Ø70mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C

Shipment Data



Packing Qty:	1pc/Carton
Carton Size:	830*200*110mm
(length*width*height)	/32.7*7.9*4.3in
Packing Weight:	4.1kg/9.0lb



H-Plane



V-Plane

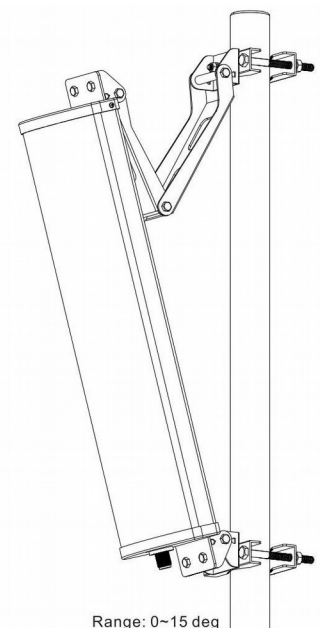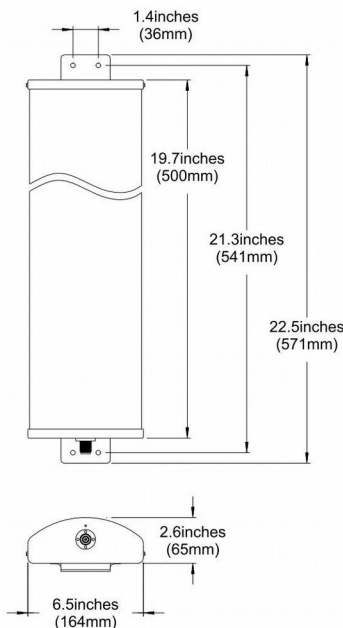

Range: 0~15 deg

Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
 Images may not reflect the actual product.