

DMS Wireless

4900-5000 MHz H-POL or V-POL

Electrical Data

Frequency:	4900-5000 MHz
Gain:	29 dBi
VSWR:	<1.5:1
Polarization:	Horizontal or Vertical
Horizontal Beamwidth :	7°
Vertical Beamwidth:	5°
Nominal Impedance:	50 Ohms
F/B Ratio:	>25
Max Input Power:	100 W
Lightning Protection	DC Ground


Mechanical Data

Connector :	N Female
Dimensions:	1021*600*380mm
(diameter*height)	/40.2*23.6*15.0in
Weight:	4.5kg/9.9lb
Reflector Material:	Brass
Mounting Method:	Mast
Mast Size:	Ø30-Ø50mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C


Shipment Data

Packing Qty:	5pcs/Carton
Carton Size:	630*565*230mm
(length*width*height)	/24.8*22.2*9.1in
Packing Weight:	23.3kg/51.3lb



PB4900-5000-29HV



H-Plane



V-Plane

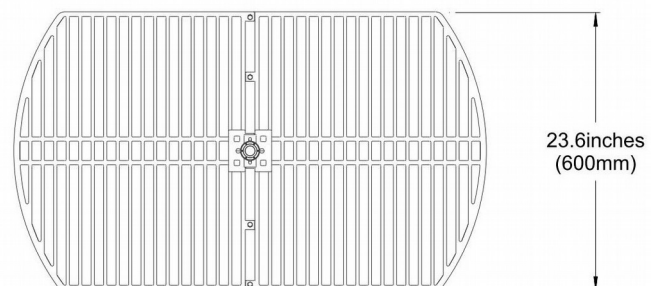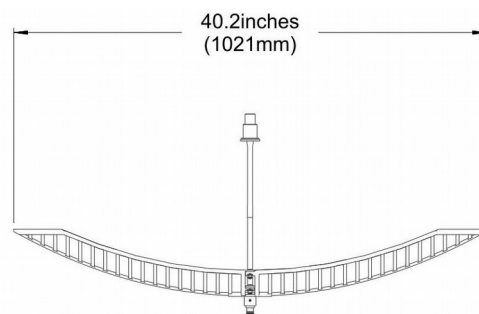

Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
Images may not reflect the actual product.