

DMS Wireless

2400-2483 MHz H-POL or V-POL

Electrical Data

Frequency:	2400-2483 MHz
Gain:	16 dBi
VSWR:	<1.5:1
Polarization:	Horizontal or Vertical
Horizontal Beamwidth :	25°
Vertical Beamwidth:	25°
Nominal Impedance:	50 Ohms
F/B Ratio:	>30
Max Input Power:	50 W
Lightning Protection	DC Ground


Mechanical Data

Connector :	N Female
Dimensions:	Ø246*120mm
(diameter*height)	/Ø9.7*4.7in
Weight:	0.9kg/1.9lb
Reflector Material:	Brass
Mounting Method:	Mast
Mast Size:	Ø30-Ø50mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C


Shipment Data

Packing Qty:	10pcs/Carton
Carton Size:	700*520*270mm
(length*width*height)	/27.6*20.4*10.6in
Packing Weight:	10.5kg/23.1lb



BA2400-2483-16HV



H-Plane



V-Plane

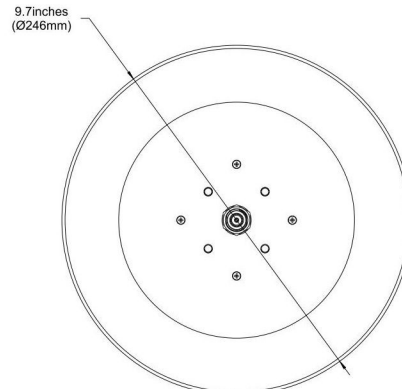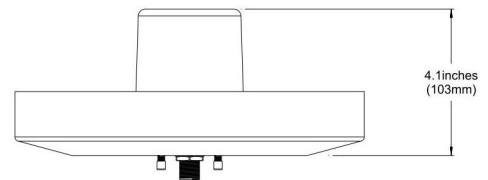

Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
Images may not reflect the actual product.