

DMS Wireless

1850-1930 MHz 25° H-POL or V-POL

Electrical Data

Frequency:	1850-1930 MHz
Gain:	17 dBi
VSWR:	<1.5:1
Polarization:	Vertical or Horizontal
Horizontal Beamwidth :	25°
Vertical Beamwidth:	25°
Nominal Impedance:	50 Ohms
F/B Ratio:	>25 dB
Max Input Power:	100 W
Lightning Protection:	DC Ground


Mechanical Data

Connector :	SMA Female
Dimensions:	300*300*45mm
length*width*height	/11.8*11.8*1.8in
Weight:	1.4kg/3.0lb
Reflector Material:	Aluminum Alloy
Radome Material:	Weatherproof ABS
Mounting Method:	Mast
Mast Size:	Ø30-Ø50mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C


Shipment Data

Packing Qty:	10pcs/Carton
Carton Size:	650*350*350mm
(length*width*height)	/25.6*13.8*13.8in
Packing Weight:	14.2kg/31.3lb



PA1850-1930-25-17HV



H-Plane



V-Plane

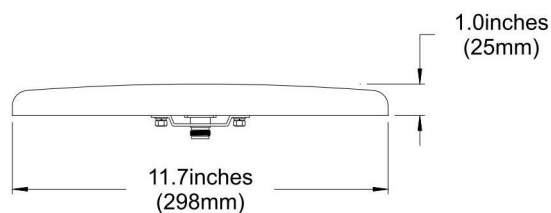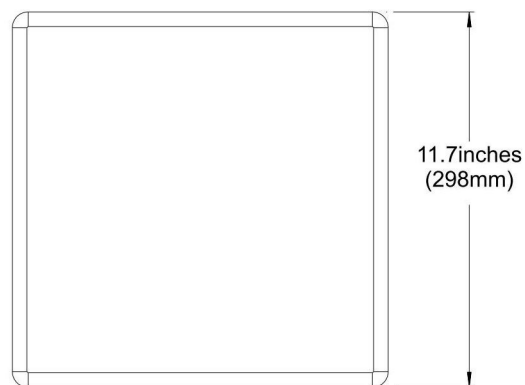

Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
Images may not reflect the actual product.