

DMS Wireless

2400-2483 MHz H-POL or V-POL

Electrical Data

Frequency:	2400-2483 MHz
Gain:	19 dBi
VSWR:	<1.5:1
Polarization:	Horizontal or Vertical
Horizontal Beamwidth :	12°
Vertical Beamwidth:	16°
Nominal Impedance:	50 Ohms
F/B Ratio:	>25
Max Input Power:	100 W
Lightning Protection	DC Ground


Mechanical Data

Connector :	N Female
Dimensions:	420*630mm
(diameter*height)	/16.5*24.8in
Weight:	2.4kg/6.6lb
Reflector Material:	Brass
Mounting Method:	Mast
Mast Size:	Ø30-Ø50mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C


Shipment Data

Packing Qty:	5pcs/Carton
Carton Size:	530*370*160mm
(length*width*height)	20.9*14.6*6.3in
Packing Weight:	14kg/30.8lb


GA2400-2483-19HV



H-Plane



V-Plane

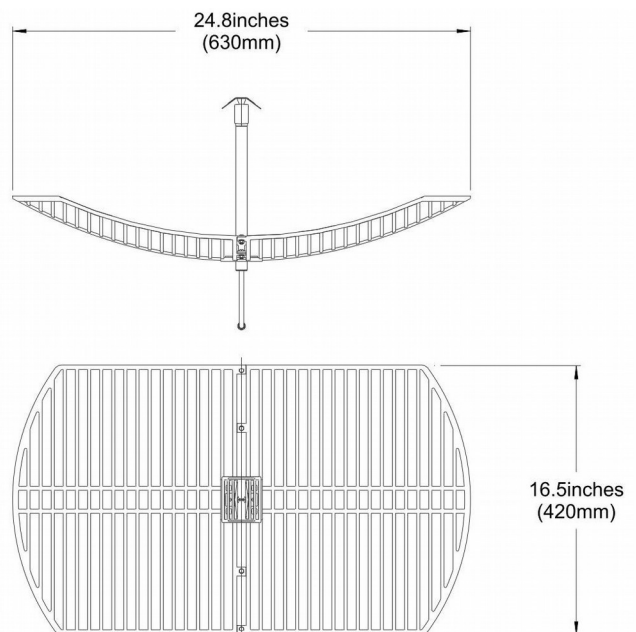

Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
Images may not reflect the actual product.