

DMS Wireless

2400-2483 MHz 35° V-POL

Electrical Data



| | |
|------------------------|------------------------|
| Frequency: | 2400-2483 MHz |
| Gain: | 15 dBi |
| VSWR: | <1.5:1 |
| Polarization: | Vertical or Horizontal |
| Horizontal Beamwidth : | 35° |
| Vertical Beamwidth: | 35° |
| Nominal Impedance: | 50 Ohms |
| F/B Ratio: | >25 dB |
| Max Input Power: | 50 W |
| Lightning Protection: | DC Ground |

Mechanical Data

| | |
|------------------------|------------------|
| Connector : | N Female |
| Dimensions: | 230*230*68mm |
| length*width*height | /9.1*9.1*2.7in |
| Weight: | 0.9kg/1.9lb |
| Reflector Material: | Aluminum Alloy |
| Radome Material: | Weatherproof ABS |
| Mounting Method: | Mast |
| Mast Size: | Ø30-Ø50mm |
| Rated Wind Velocity: | 210km/h |
| Operating temperature: | -40~+65°C |

Shipment Data



| | |
|-----------------------|-------------------|
| Packing Qty: | 10pcs/Carton |
| Carton Size: | 500*260*530mm |
| (length*width*height) | /19.7*10.2*20.9in |
| Packing Weight: | 10kg/22.0lb |



PA2400-2483-35-15V-2



- Adopts eXtended Range™ technology
- Up to 54Mbps wireless data rate and fully Compatible with IEEE 802.11g/b products
- High performance 15dBi patch antenna
- Provides 64/128/152-bit WEP Encryption and WPA/WPA2/WPA-PSK/WPA2-PSK, IEEE 802.1X, TKIP, AES security

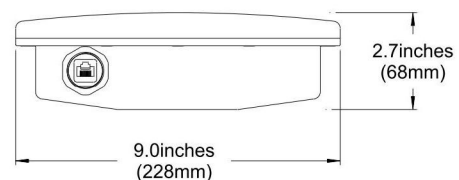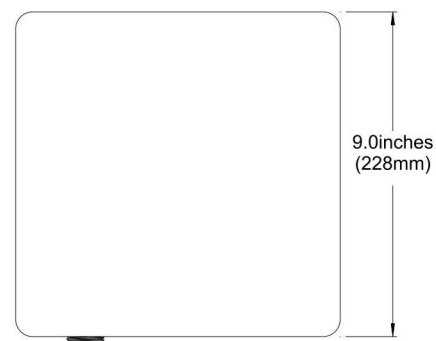

Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
Images may not reflect the actual product.