

# DMS Wireless

5725-5850 MHz 10° H-POL or V-POL

## Electrical Data


Frequency:	5725-5850 MHz
Gain:	23 dBi
VSWR:	<1.5:1
Polarization:	Vertical or Horizontal
Horizontal Beamwidth :	10°
Vertical Beamwidth:	10°
Nominal Impedance:	50 Ohms
F/B Ratio:	>25 dB
Max Input Power:	100 W
Lightning Protection:	DC Ground

## Mechanical Data


Connector :	N Female
Dimensions:	300*300*45mm
length*width*height	/11.8*11.8*1.8in
Weight:	1.4kg/3.0lb
Reflector Material:	Aluminum Alloy
Radome Material:	Weatherproof ABS
Mounting Method:	Mast
Mast Size:	Ø30-Ø50mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C

## Shipment Data

Packing Qty:	10pcs/Carton
Carton Size:	650*350*350mm
(length*width*height)	/20.9*12.6*12.6in
Packing Weight:	14.2kg/31.3lb




H-Plane



V-Plane

## PA5725-5850-10-23HV

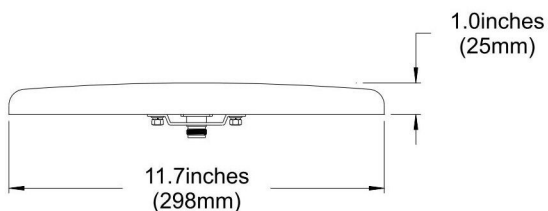

Email: [sales@dmswireless.com](mailto:sales@dmswireless.com)  
[www.dmswireless.com](http://www.dmswireless.com)

Notice: Specifications are subject to change without notice.  
Images may not reflect the actual product.