

DMS Wireless

3400-3600 MHz 120° V-POL

Electrical Data

Frequency:	3400-3600 MHz
Gain:	15 dBi
VSWR:	<1.5:1
Polarization:	Vertical
Horizontal Beamwidth :	120°
Vertical Beamwidth:	7°
Nominal Impedance:	50 Ohms
F/B Ratio:	>20 dB
Max Input Power:	100 W
Lightning Protection:	DC Ground


Mechanical Data

Connector :	N Female
Dimensions:	776*165*70mm
length*width*height	/30.6*6.5*2.8in
Weight:	4kg/8.8lb
Reflector Material:	Aluminum Alloy
Radome Material:	UV Resistance PVC
Mounting Method:	Mast
Mast Size:	Ø40-Ø70mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C


Shipment Data

Packing Qty:	1 pc/Carton
Carton Size:	1040*200*110mm
(length*width*height)	/40.9*7.9*4.3in
Packing Weight:	4.6kg/10.1lb



PA3400-3600-120-15V



H-Plane



V-Plane

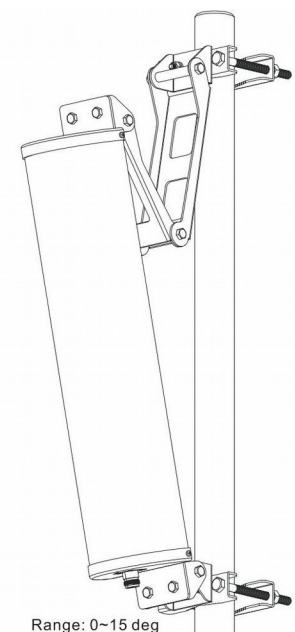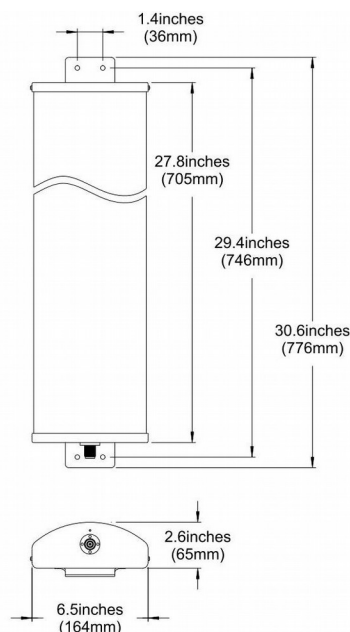

Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
Images may not reflect the actual product.