

DMS Wireless

2500-2686 MHz 90° V-Pol

Electrical Data

Frequency:	2500-2686 MHz
Gain:	17 dBi
VSWR:	<1.5:1
Polarization:	Vertical
Horizontal Beamwidth :	65°
Vertical Beamwidth:	8°
Nominal Impedance:	50 Ohms
F/B Ratio:	>20 dB
Max Input Power:	100 W
Lightning Protection:	DC Ground


Mechanical Data

Connector :	N Female
Dimensions:	1045*165*70mm
length*width*height	/41.15*6.50*2.76in
Weight:	4.1kg/9.03lb
Reflector Material:	Aluminum Alloy
Radome Material:	UV Resistance PVC
Mounting Method:	Mast
Mast Size:	Ø40-Ø70mm
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C


Shipment Data

Packing Qty:	1pc/Carton
Carton Size:	1280*200*110mm
(length*width*height)	50.4*7.9*4.3in
Packing Weight:	5kg/11lb



PA2500-2686-90-17V



H-Plane



V-Plane

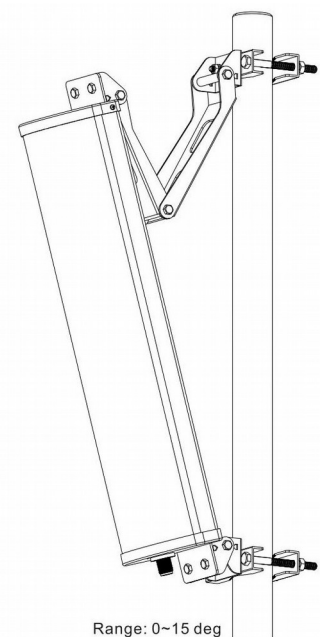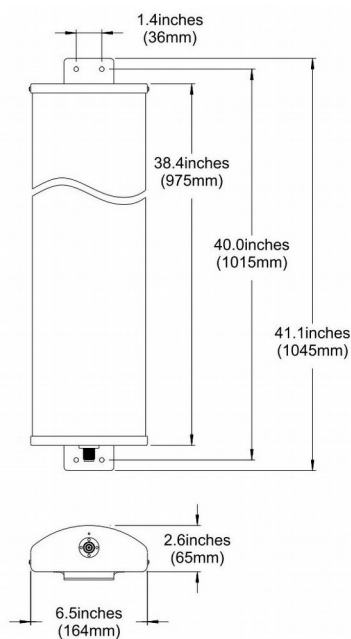

Range: 0~15 deg

Email: sales@dmswireless.com
www.dmswireless.com

Notice: Specifications are subject to change without notice.
 Images may not reflect the actual product.